

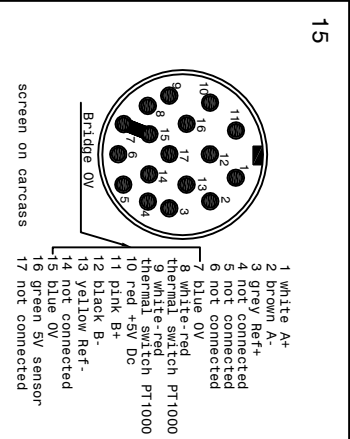


Cooling capacity = 2450 Watt
Grease Bearings Lubrication

- 1 - Coolant inlet (G1/8") (4+5 l/min.) 83+4 bar)
- 2 - Coolant outlet (G1/8")
- 5 - Electric connection (L=300mm)
- 3 Phases motor - Earth
- 7 - Front-side pressurization filtered (5µ)
- (1-1.5 bar) (G1/8")
- 15 - Outlet encoder's cables (Gel 2444 KN) (L=300mm)
- Motor thermal switch (N°1 Pt 1000)

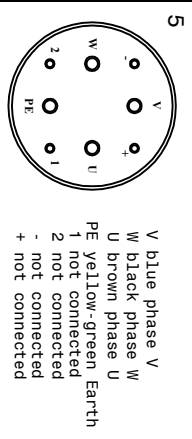

SPEED	RPM	6000	10000	13500	20000	25000
FREQUENCY	Hz	313	513	685	1000	1250
POWER (S1)	KW	9	15	15	15	15
TORQUE (S1)	Nm	14	14	10	7	6
TENSION	V	174	285	380	380	380
CURRENT	A	27	27	22	19	18

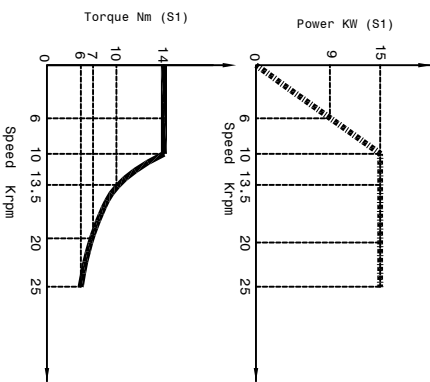

Asynchronous Motor : 6 poles
Runout taper 0.002mm

Peron Speed
SUBJECT: PSI MTM-100
CUSTOMER: