


Cooling capacity = 6200 Watt  
Grease bearings Lubrication

- 1-Coolant inlet (G1/2") (16 L/min.) (3-4 bar)
- 2-Coolant outlet (G1/2")
- 5-Electric connection (L=300)
- 3 Phases motor - Earth
- 5/a Phases U1/U3-V1/V3 n°4 cables Ø6.5 mm
- 5/a Phases W1/W3-Earth n°4 cables Ø6.5 mm
- Motor thermal switch (N°1 PT 1000)
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")

SPEED	RPM	1000	2700	4000	10000
FREQUENCY	Hz	72	184	264	667
POWER (S1)	KW	15	40	40	40
TORQUE (S1)	Nm	142	142	97	38
TENSION	V	104	265	380	380
CURRENT	A	118	117	92	78

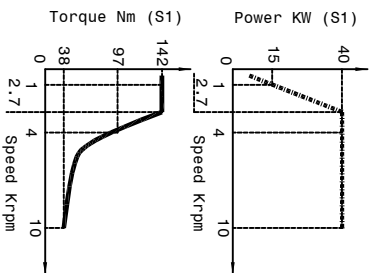

Asynchronous motor: 8 poles

Runout taper 0.002mm

**Peron Speed**  
INDUSTRIAL

SUBJECT: PSI MTM-204  
CUSTOMER:

Sheet: 1/1

DIS. N°3879-00

DATE : 15/02/2023