
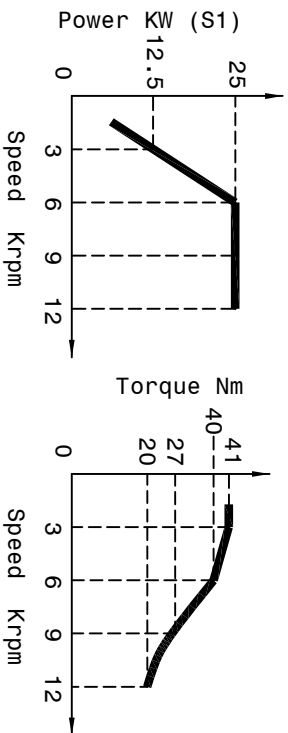



Cooling capacity = 3950 Watt
 Air-Oil Lubrication
 Mobil DTE Light ISO VG 32

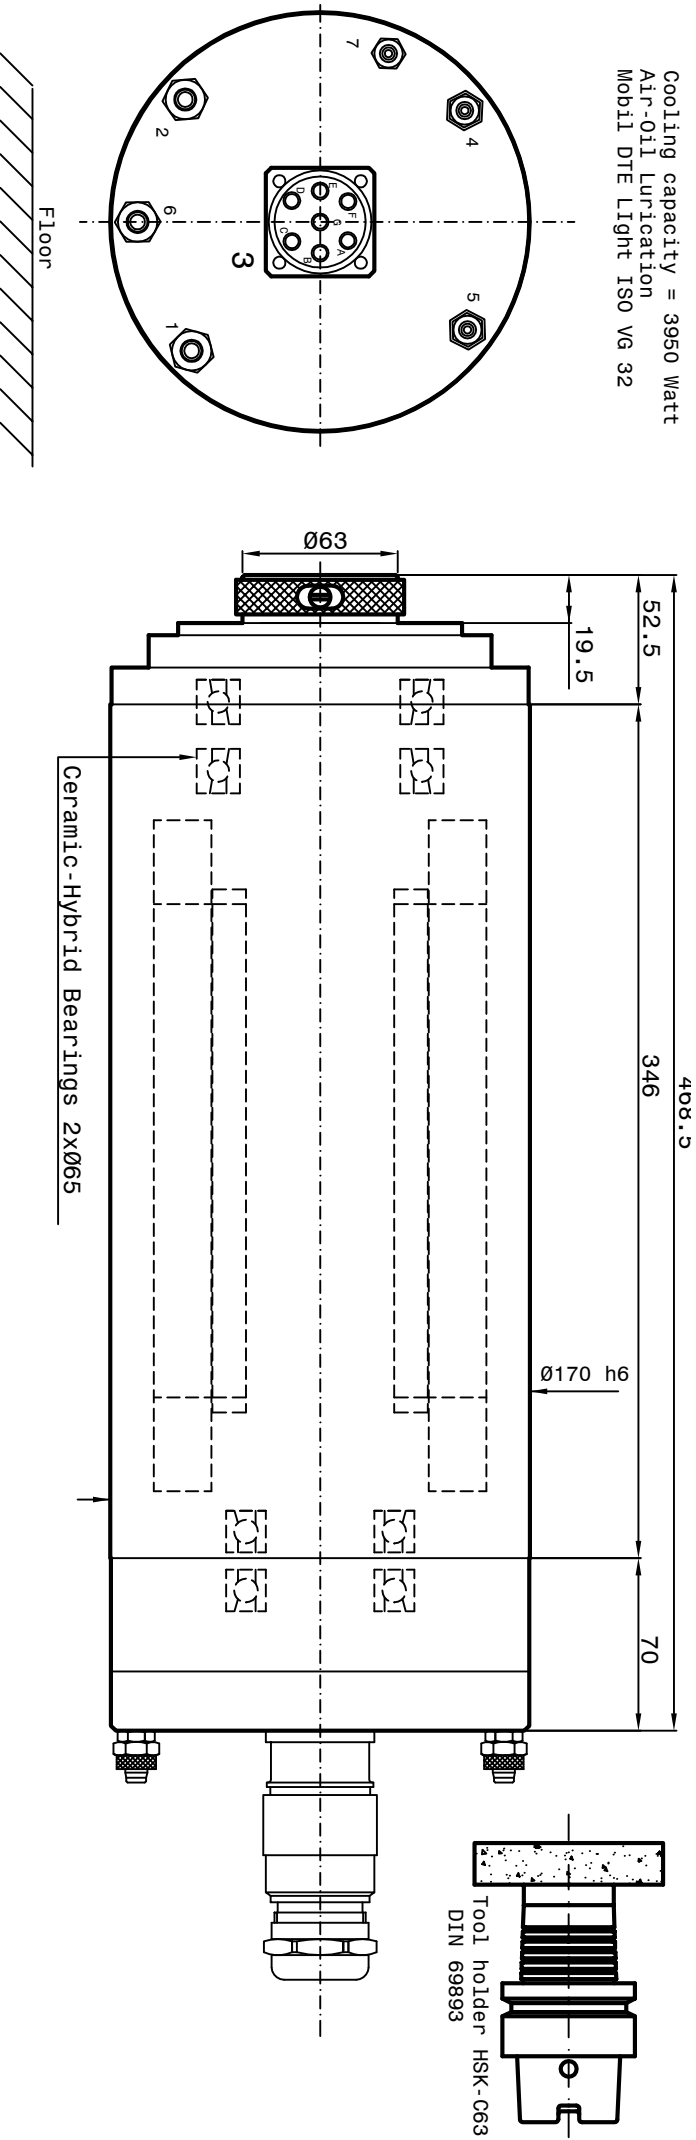

SPEED	RPM	3000	6000	9000	12000
FREQUENCY	Hz	100	200	300	400
POWER (S1)	KW	12.5	25	25	25
TORQUE (S1)	Nm	41	40	27	20
TENSION	V	190	380	380	380
CURRENT	A	59	59	47	47

Asynchronous motor : 4 poles Runout taper 0.001mm

- 1-Coolant inlet (G1/8") (3+4 bar) (4+5 L/min.)
- 2-Coolant outlet (G1/8")
- 3-Electric connection
- 3Phases motor - Earth
- Motor thermich switch (N°1 PTC130)
- 4-Front bearings Lubrication-1 (G1/8")
- 5-Rear bearings Lubrication (G1/8")
- 6-Unloading Lubrication bearings (G1/8") through aspiration type Festo
- VAD 1/8 (6 bar)
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")

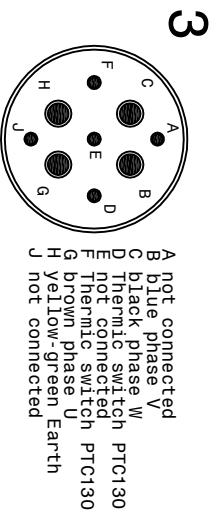

Peron Speed
 INTERNATIONAL

SUBJECT: PSI RGH-175
 CUSTOMER:

Sheet: 1/1

Dis. n° 6263-00

DATE : 24/08/2022