



Cooling capacity = 4100 Watt
Grease bearings Lubrication

- 1-Coolant inlet (G1/2") (7÷8 l/min.) (3-4 bar)
- 2-Coolant outlet (G1/2")
- 5-Electric connection (L=300)
- 3 Phases motor - Earth
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")
- 15-Outlet encoder's cables (Heidenhain) (L=300mm)
- Motor thermal switch (N°1 PT 1000)

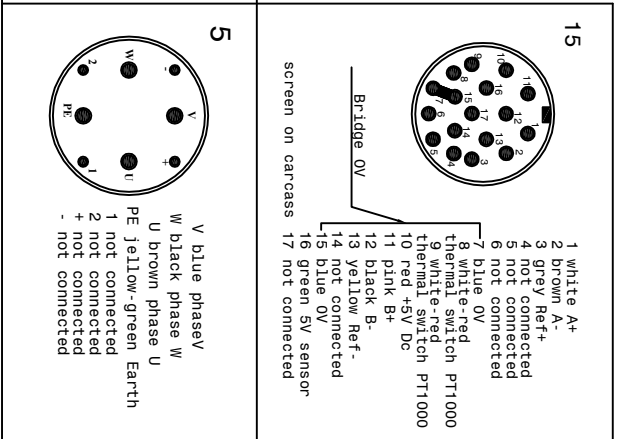

SPEED	RPM	5000	7700	10000
FREQUENCY	Hz	167	257	333
POWER (S1)	KW	26	26	26
TORQUE (S1)	Nm	50	32	25
TENSION	V	295	420	420
CURRENT	A	60	40	42

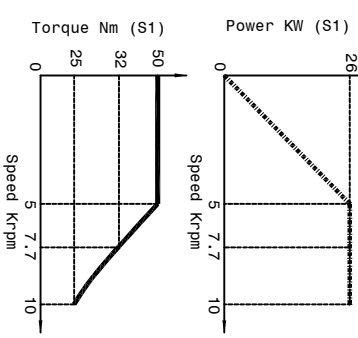

Synchronous motor: 4 poles
Runout taper: 0.002mm

Peron Speed
INTERVIEW

SUBJECT: PSI MTM-200
CUSTOMER:

Sheet: 1/1
DIS. N°1238-00-03
DATE: 15/02/2023