




Grease Bearings Lubrication
Coolant Capacity = 4150 Watt

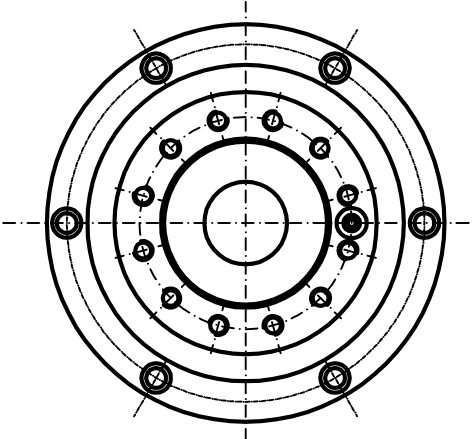

- 1-Coolant inlet (G3/8") (3-4 bar) (5-6 L/min.)
- 2-Coolant outlet (G3/8")
- 5-Electric connection
- 3 Phases motor - Earth
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")
- 15-Outlet encoder's cables (Gel 2444 KN) -motor thermal switch (N°1 PT 1000)




- A not connected
- B Blue phase V
- C black phase W
- D not connected
- E not connected
- F not connected
- G brown phase U
- H yellow-green Earth
- J not connected



- 1 white A+
- 2 brown A-
- 3 grey Ref+
- 4 not connected
- 5 not connected
- 6 not connected
- 7 blue 0V
- 8 white-brown thermal switch PT 1000
- 9 white-brown thermal switch PT 1000
- 10 red +5V Dc
- 11 pink B+
- 12 black B-
- 13 yellow Ref-
- 14 not connected
- 15 blue 0V sensor
- 16 green 5V sensor
- 17 not connected

SPEED	RPM	1500	3000	4000	6000
FREQUENCY	Hz	82	156	206	306
POWER (S1)	KW	6.5	13	17.3	26
TORQUE (S1)	Nm	41	41	41	41
TENSION	V	99	189	249	370
CURRENT	A	56	55	54	54

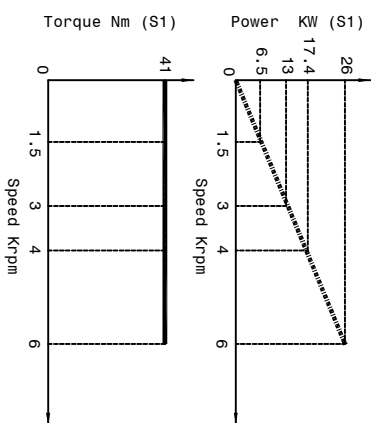

Asynchronous motor: 8 poles Runout taper 0.002mm

Peron Speed
INTECHNOLOGY
SUBJECT: PSI TA-200
ASA 6
CUSTOMER :

Sheet: 1/1 Dis. n° 2953-00-01 DATE : 02/07/2021