

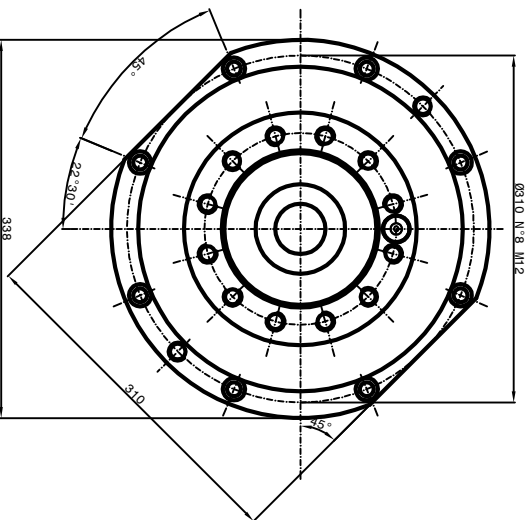



Grease Bearings Lubrication  
Coolant Capacity = 5500 Watt



- 1-Coolant inlet (G1/2") (3+4 bar) (6-8 L/min.)
- 2-Coolant outlet (G1/2")
- 5-Electric connection
- 3Phases motor - Earth
- 7-Front-side pressurization filtered (5µm)
- (1-1.5 bar) (G1/8")
- 15-Outlet encoder's cables (Gel 2444 KN)
- Motor thermal switch (N°1 PT 1000)

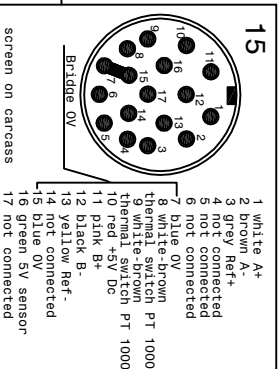

SPEED	RPM	900	1200	1600	4500
FREQUENCY	Hz	63	82	109	300
POWER (S1)	KW	26.6	35.1	35.1	35.1
TORQUE (S1)	Nm	283	283	209.5	76
TENSION (S1)	V	225	285	380	380
CURRENT (S1)	A	97	97	78	67

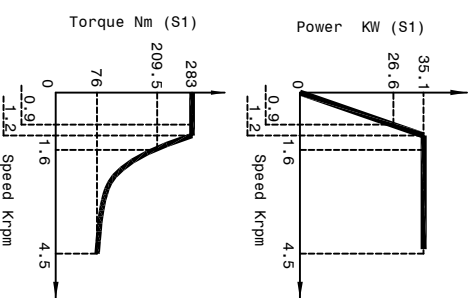

Asynchronous motor: 8 poles Runout taper 0.002mm

**Peron Speed**  
SUBJECT : PSI TA-206  
CUSTOMER : ASA 8

Sheet:1/1 Dls. n° 4337-00-04 DATE : 02/07/2021