


Ceramic-Hybrid Bearings 3xØ100

Encoder L+B GEL 2444 KN  
1Vpp - Z=256 - m=05

Grease Bearings Lubrication  
Coolant Capacity = 4900 Watt


- 1-Coolant inlet (G1/2") (3+4 bar) (6+8 L/min.)
- 2-Coolant outlet (G1/2")
- 5-Electric connection
- 3Phases motor - Earth
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")
- 15-Outlet encoder's cables (Gel 2444 KN)
- Motor thermal switch (N°1 PT 1000)



- 15**
- 1 white A+
  - 2 brown A-
  - 3 grey Ref+
  - 4 not connected
  - 5 not connected
  - 6 not connected
  - 7 blue 0V
  - 8 white-brown thermal switch PT 1000
  - 9 white-brown thermal switch PT 1000
  - 10 red +5V Dc
  - 11 pink B+
  - 12 black B-
  - 13 yellow Ref-
  - 14 not connected
  - 15 blue 0V
  - 16 green 5V sensor
  - 17 not connected
- screen on carcass

SPEED	RPM	2300	8000
FREQUENCY	Hz	115	418
POWER (S1)	KW	32	32
TORQUE (S1)	Nm	133	37
TENSION	V	222	420
CURRENT	A	133	52

Choke = 0.6 mH/phase

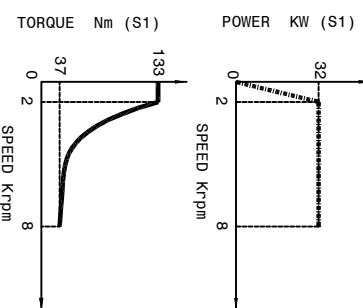

Synchronous Motor: 6 Poles Runout taper: 0.002mm

**Peron Speed**  
SUBJECT: PSI TA-202  
ASA 6  
CUSTOMER :