



Grease Bearings Lubrication
Coolant Capacity = 3150 Watt

- 1-Coolant inlet (G1/2") (3+4 bar) (5+6 L/min.)
- 2-Coolant outlet (G1/2")
- 3-Inlet oil piston tool change (50 bar) (G1/4")
- 4-Inlet oil return piston (50 bar) (G1/4")
- 5-Electric connection
Splices motor - Earth
- 6-Outlet cables sensor (S1)
- S1-Sensor to detect the position of the drawbar
- 7-Inlet air filtered (5µm) for pressurization (G1/8") (1-1.5 bar max)
- 15-Outlet encoder's cables (ERA 4280-C) (G1/8")
- 19-Inlet air front surface of the spindle

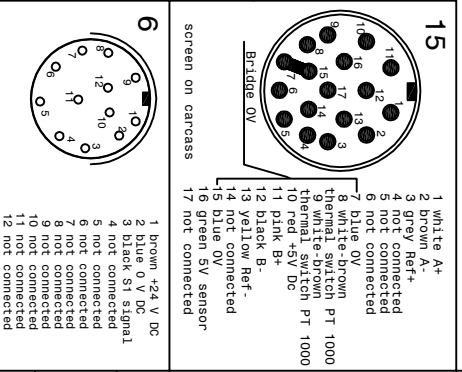

SPEED	RPM	1800	2500	3000	4000
FREQUENCY	Hz	90	125	150	200
POWER (S1)	KW	19	19	19	19
TORQUE (S1)	Nm	100	72	60	45

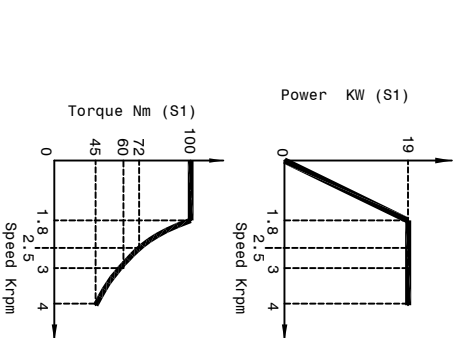

Synchronous motor: 6 poles Runout taper: 0.002mm

Peron Speed SUBJECT: PSI TA-207
KINEMATIC ASA 11
CUSTOMER :

Sheet: 1/1 Dls: n°2897-00-03 DATE: 02/07/2021