



Cooling capacity = 9250 Watt
Grease Bearings Lubrication

- 1-Coolant inlet (G1/2") (20-21 l/min.) (3-4 bar)
- 2-Coolant outlet (G1/2")
- 3-Hydraulic pressure unclamping tool (50bar max) (G3/8")
- 4-Hydraulic pressure clamping tool (10bar max) (G1/4")
- 5-Electric connection L=500 mm
- 6-Outlet sensor's cables (S6-S5)L=500mm
- 7-Front side pressurization filterred (5µm) Motor thermal switch (N°1 PT 1000)L=500mm
- 8-Analogic Sensor Balluff
- 9-Encoder's cables (G1/8")
- 10-Encoder's cables (G1/8")
- 11-Outlet sensor's cables (G1/8")
- 12-Encoder's cables (G1/8")
- 13-Encoder's cables (G1/8")
- 14-Encoder's cables (G1/8")
- 15-Encoder's cables (G1/8")
- 16-Encoder's cables (G1/8")
- 17-Encoder's cables (G1/8")
- 18-Rotary joint Leackage outlet(G1/8")

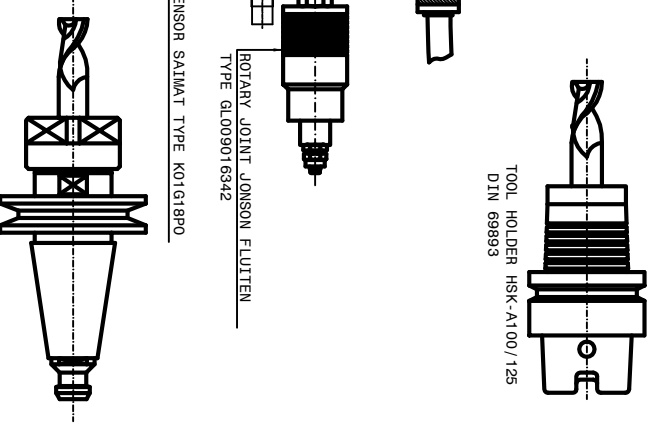

SPEED	780	1100	8000	6000	
FREQUENCY	Hz	52	77	200	400
POWER (S1)	Kw	60	60	200	32
TORQUE (S1)	Nm	230	800	450	320
CURRENT (S1)	A	180	148	114	61

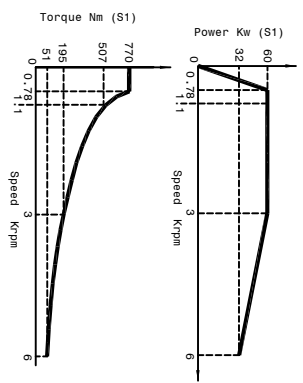

Asynchronous motor's poles
Runout taper 0.002mm
SUBJECT: PSI TCY-308
CUSTOMER:
Sheet:1/1
DTS: N°3556-00-05A
DATE: 08/08/2022