



Grease Bearings Lubrication
 COILING CAPACITY = 3800 WATT

- 1- Coolant inlet (2xØ10) (3-4 bar) (12+3 L/min.)
- 2- Coolant outlet (2xØ10)
- 3- Hydraulic pressure uncoupling (Ø6)
- 4- Hydraulic pressure clamping tool (Return piston) (10bar max) (Ø6)
- 5- Electric connection (L=2000)
 Phase U n°2 Wires Ø8
 Phase V n°2 Wires Ø8
 Earth n°2 Wires Ø5.5
- 6- Outlet sensor's cables (S6) (L=2000mm)
- SS PMP = Resting piston
- Out 100 Bearing's temperature sensor
 -Out 100 Bearing's temperature sensor (N°1 Pt 1000)
- 7- Front-side pressurization filtered (5um) (1-1.5 bar) (Ø4)
- 8- Tool cooling water (Ø10)(20 bar)
- 17- Tool's Lubro refrigerant inlet by rotary (60 bar) (Ø10) sensor's cleaning (6 bar)
- 18- Rotary joint leakage outlet (Ø1/8")

SPEED	1500	1000	500
TORQUE (S1)	52	82	82
POWER (S1)	1100	62	62
CHOKING (S1)	1.52	1.52	1.52

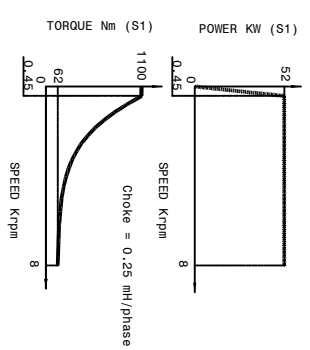

Peron Speed
 CUSTOMER: SUBJECT : PS ES-303
 DATE: DIS. N° 4061-00
 Sheet: 1/1

Synchronous Motor: 16 poles
 Runout taper: 0.008mm