
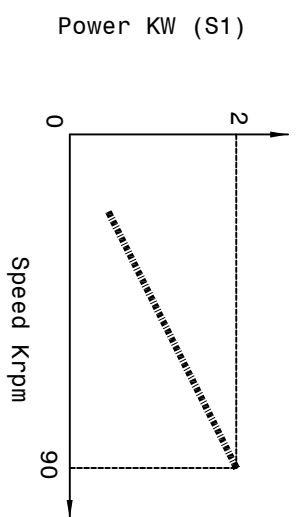
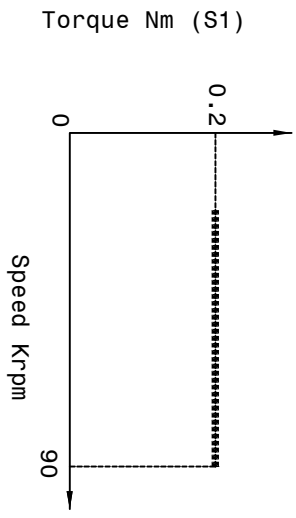


Cooling capacity = 450 Watt  
 Air-Oil Lubrication  
 Mobil DTE Light ISO VG 32

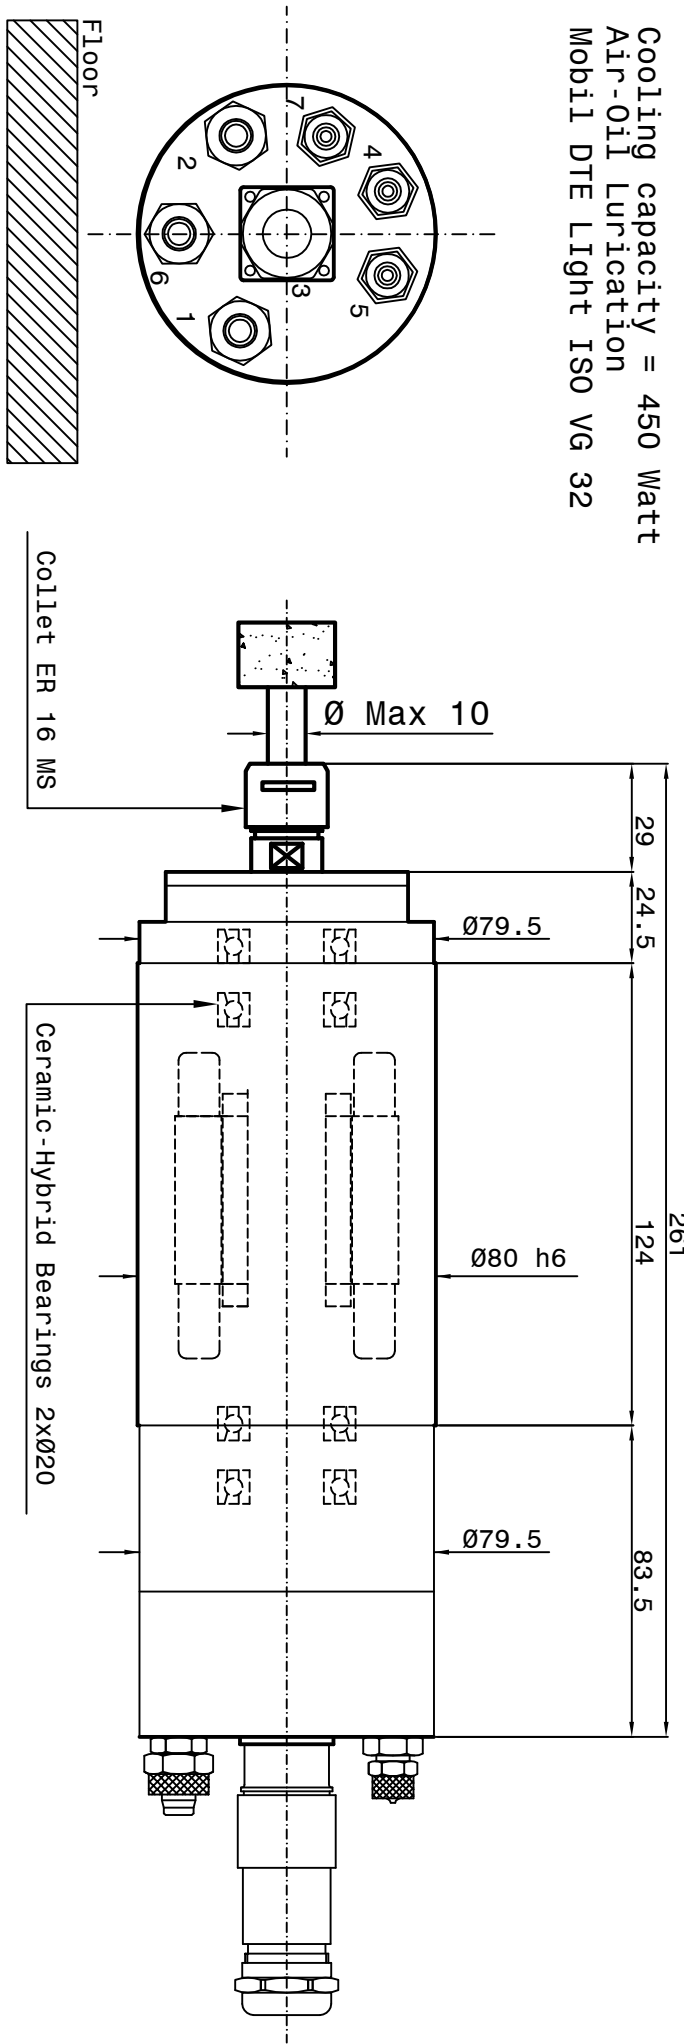


SPEED	RPM	90000
FREQUENCY	Hz	1500
POWER (S1)	KW	2
TORQUE (S1)	Nm	0.2
TENSION	V	380
CURRENT	A	5

Asynchronous motor: 2 poles

Runout taper 0.002mm

- 1-Coolant inlet (G1/8") (2±0.1/min.) (3-4 bar)
- 2-Coolant outlet (G1/8")
- 3-Electric connection
- 3 Phases motor - Earth
- Motor thermal switch (N°1 PTC 130)
- 4-Front bearings Lubrication (G1/8")
- 5-Rear bearings Lubrication (G1/8")
- 6-Unloading Lubrication type Festo through aspiration type Festo
- VAD 1/8 (6 bar)
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")



- 3**
- 1 brown phase U
  - 2 yellow-green Earth
  - 3 blue phase V
  - 4 black phase W
  - A thermal switch PTC130
  - B thermal switch PTC130
  - C not connected
  - D not connected

**Peron Speed**  
 INTERNATIONAL

SUBJECT: PSI RGC-102  
 CUSTOMER:

Sheet: 1/1

Dis.n°5561-00

DATE : 22/08/2022