

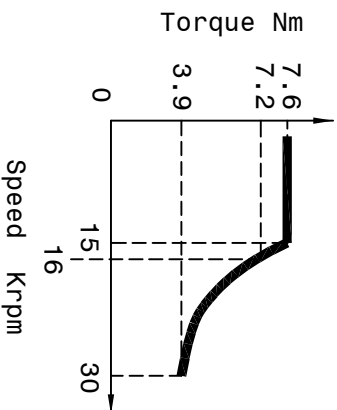
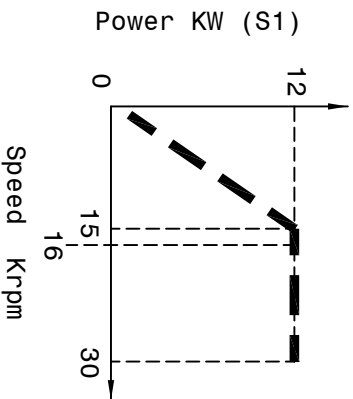


Cooling capacity = 1950 Watt  
 Air-Oil Lubrication  
 Mobil DTE Light ISO VG 32

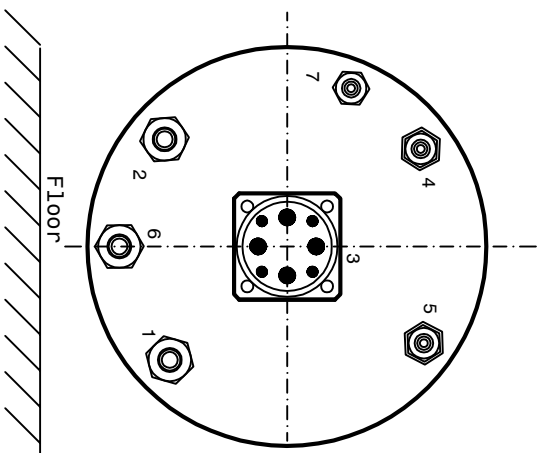


SPEED	RPM
15000	16000
30000	
FREQUENCY	Hz
500	536
1000	
POWER (S1)	KW
12	12
TORQUE (S1)	Nm
7.6	7.2
3.9	
TENSION	V
360	380
CURRENT	A
25.8	24.7
	23.1

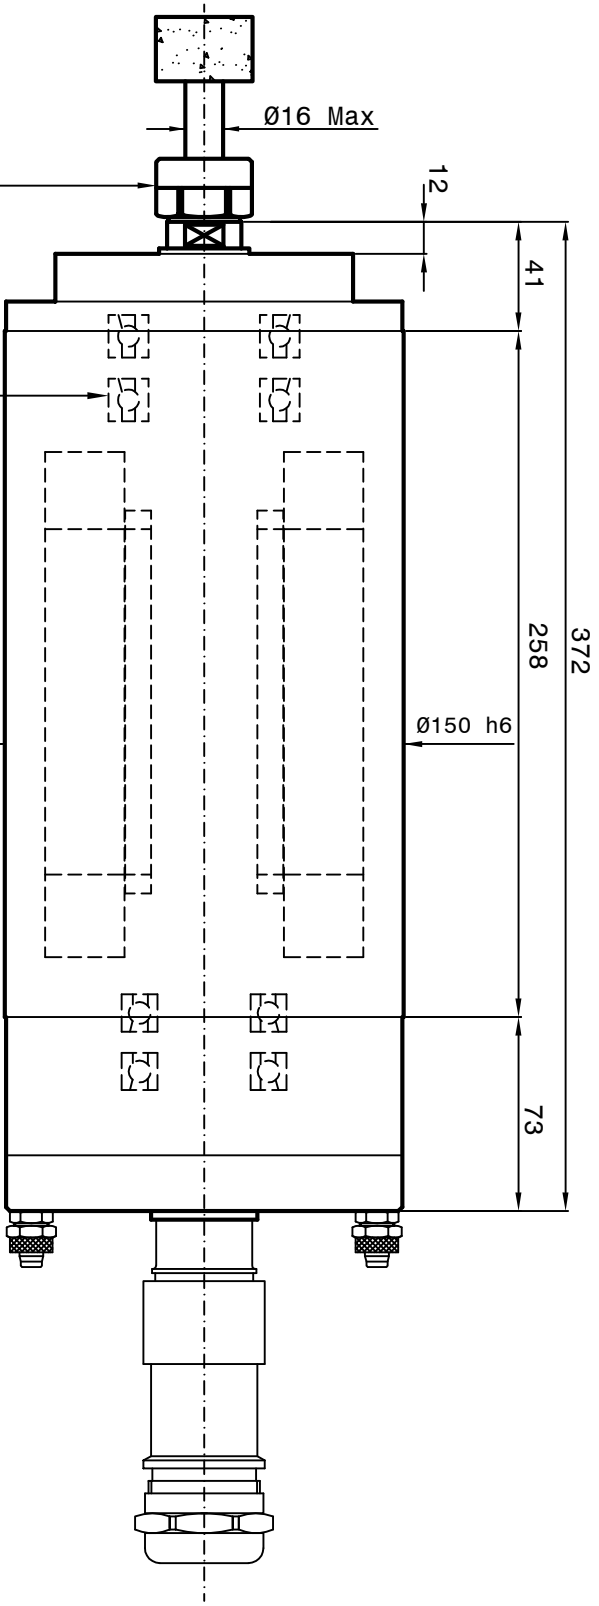

Asynchronous motor : 4 poles Runout taper 0.001mm

- 1-Coolant inlet (G1/8") (3±4 bar) (4±5 L/min.)
- 2-Coolant outlet (G1/8")
- 3-Electric connection
- 3Phases motor - Earth
- Motor thermich switch (N°1 PTC 130)
- 4-Front bearings Lubrication (G1/8")
- 5-Rear bearings Lubrication (G1/8")
- 6-Unloading Lubrication bearings (G1/8") through aspiration type Festo
- VAD 1/8 (6 bar)
- 7-Front-side Pressurization filtered (5µm) (1-1.5 bar) (G1/8")

3



- V blue phase V
- W black phase W
- U brown phase U
- PE yellow-green Earth
- 1 not connected
- 2 not connected
- + thermic switch PTC 130
- thermic switch PTC 130

**Peron Speed**  
 INTERNATIONAL

SUBJECT: PSI RGC-150  
 CUSTOMER:

Sheet: 1/1

Dis.n° 4199-00

DATE : 24/08/2022