
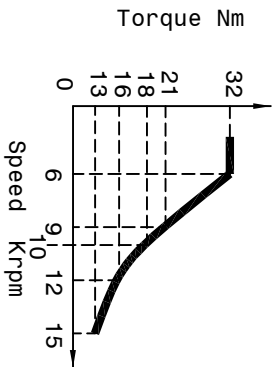
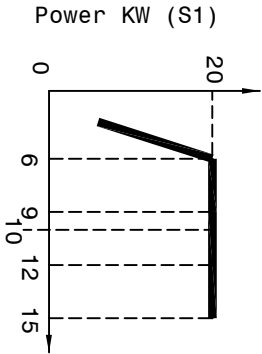


Cooling capacity = 3250 Watt
 Air-Oil Lubrication
 Mobil DTE Light ISO VG 32

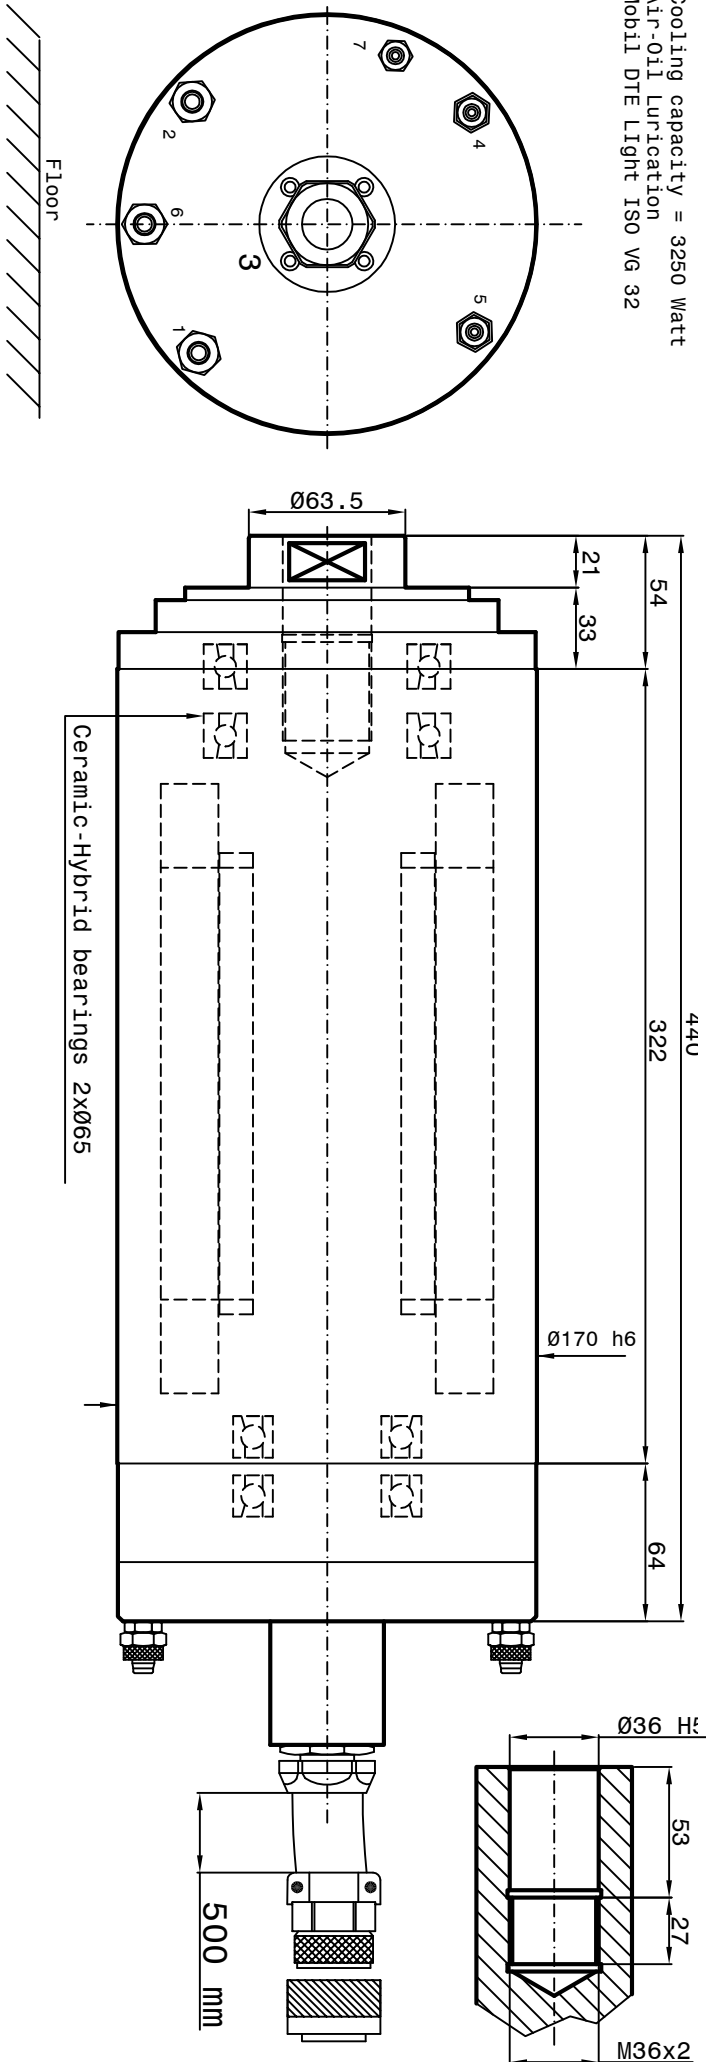


SPEED	RPM	6000	9000	10000	12000	15000
FREQUENCY	Hz	205	305	341	405	500
POWER (S1)	KW	20	20	20	20	20
TORQUE (S1)	Nm	32	21	18	16	13
TENSION	V	228	340	380	380	380
CURRENT	A	71	54	51	42	38

Asynchronous motor : 4 poles Runout taper 0.001mm

- 1-Coolant inlet (G1/8") (3+4 bar) (4+5 L/min.)
- 2-Coolant outlet (G1/8")
- 3-Electric connection
- 3Phases motor - Earth
- Motor thermostat switch (N°1 PTC130)
- 4-Front bearings Lubrication-1 (G1/8")
- 5-Rear bearings Lubrication (G1/8")
- 6-Unloading Lubrication Bearings (G1/8") through aspiration Type Festo
- VAD 1/8 (6 bar)
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")

3



- A not connected
- B blue phase V
- C black phase W
- D Thermal switch PTC130
- E TDS connected
- F Thermal switch PTC130
- G brown phase U
- H yellow-green Earth
- J not connected

Peron Speed
 INTERNATIONAL

SUBJECT: PSI RGP-171
 CUSTOMER:

Sheet: 1/1

Dis. n° 2353-00-02

DATE : 24/08/2022