
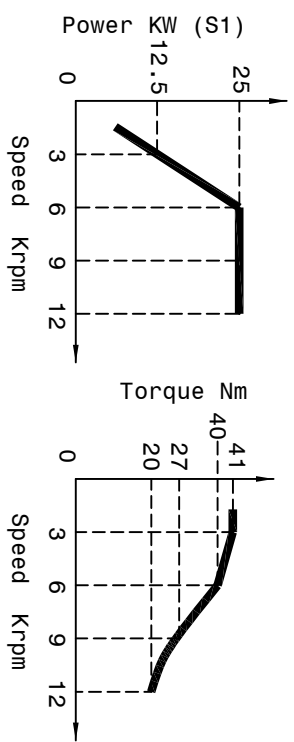



Cooling capacity = 3950 Watt  
 Air-Oil Lubrication  
 Mobil DTE Light ISO VG 32

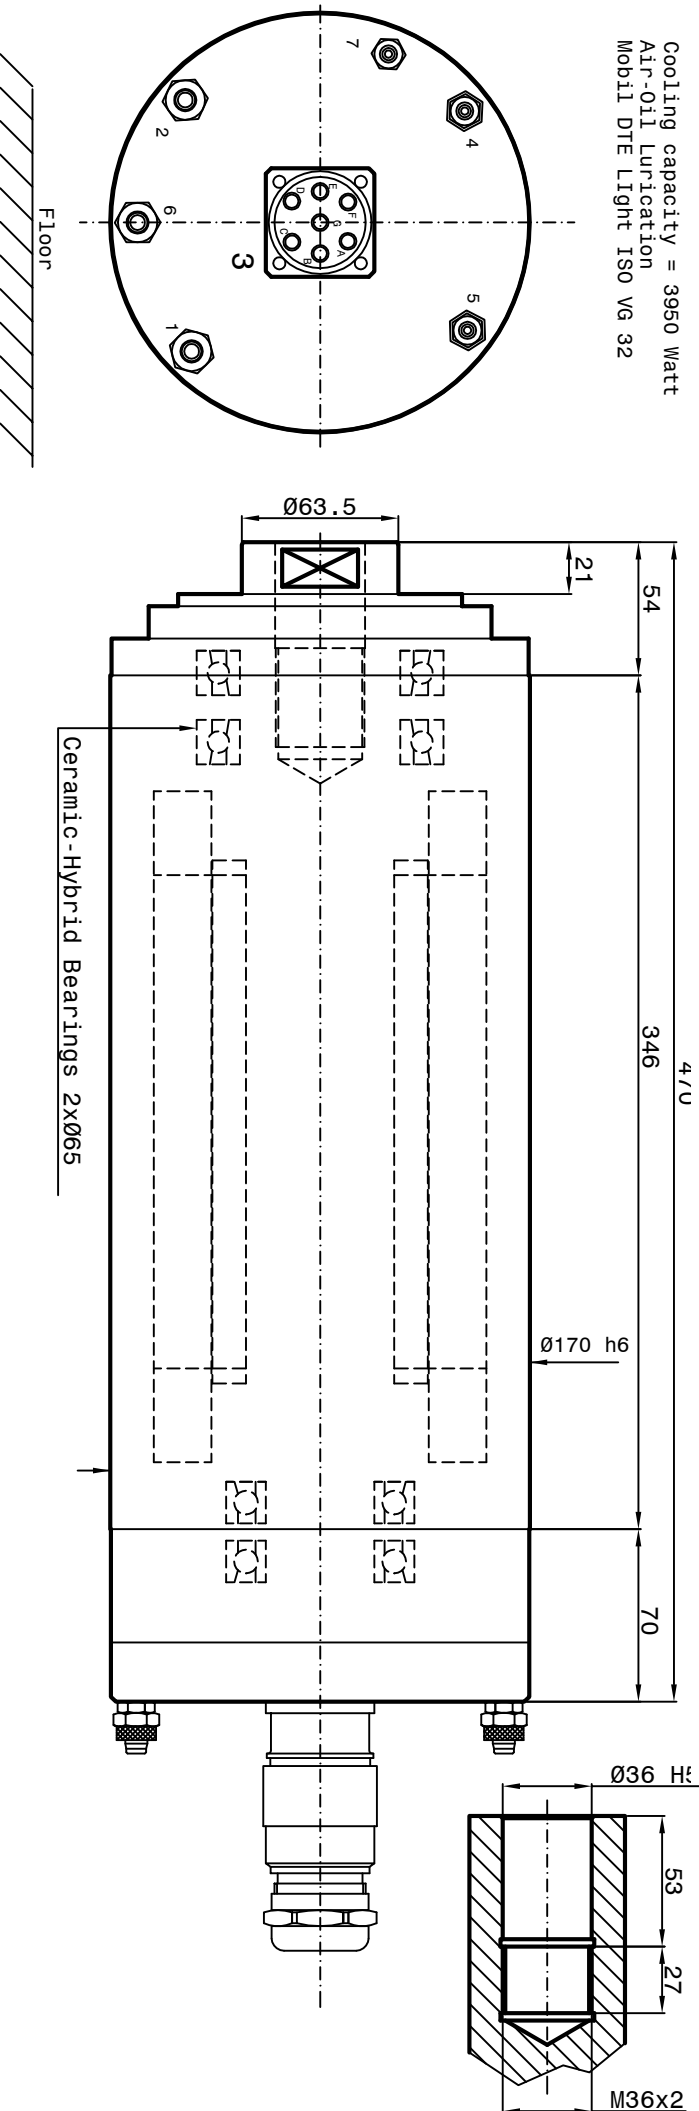

SPEED	RPM	3000	6000	9000	12000
FREQUENCY	Hz	100	200	300	400
POWER (S1)	KW	12.5	25	25	25
TORQUE (S1)	Nm	41	40	27	20
TENSION	V	190	380	380	380
CURRENT	A	59	59	47	47

Asynchronous motor : 4 poles Runout taper 0.001mm

- 1-Coolant inlet (G1/8") (3+4 bar) (4+5 L/min.)
- 2-Coolant outlet (G1/8")
- 3-Electric connection
- 3Phases motor - Earth
- Motor thermich switch (N°1 PTC130)
- 4-Front bearings Lubrication-1 (G1/8")
- 5-Rear bearings Lubrication (G1/8")
- 6-Unloading Lubrication bearings (G1/8") through aspiration type Festo
- VAD 1/8 (6 bar)
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")

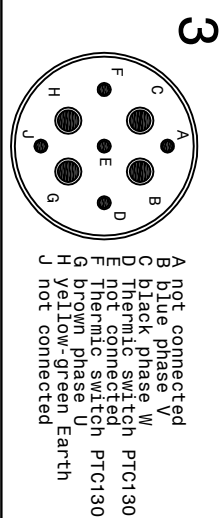

**Peron Speed**  
 INTERNATIONAL

SUBJECT : PSI RGP - 174  
 CUSTOMER :

Sheet : 1 / 1 Dis. n° 2989-00 DATE : 24/08/2022