



Grease Bearings Lubrication
Coolant Capacity = 2750 Watt

- 1-Coolant inlet (G1/2") (3÷4 bar) (5÷6 L/min.)
- 2-Coolant outlet (G1/2")
- 5-Electric connection
- 3Phases motor - Earth
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")
- 15-Outlet encoder's cables (Gel 2444 KN) -Motor thermal switch (N°1 PT 1000)
- 16-Rear-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")

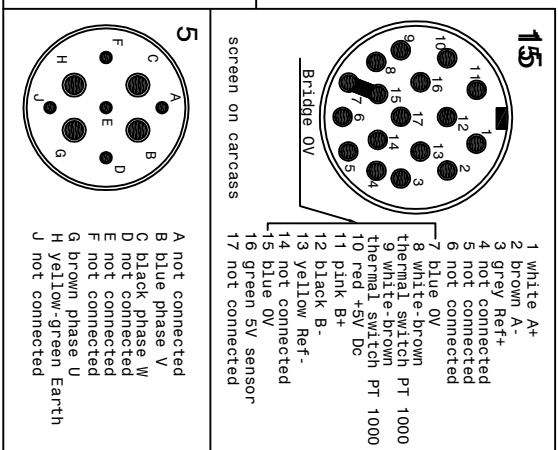

SPEED	RPM	1000	1600	7000
FREQUENCY	Hz	50	80	350
POWER (S1)	KW	10.2	16.8	16.8
TORQUE (S1)	Nm	100	100	23
TENSION	V	308	380	380
CURRENT	A	43	43	32

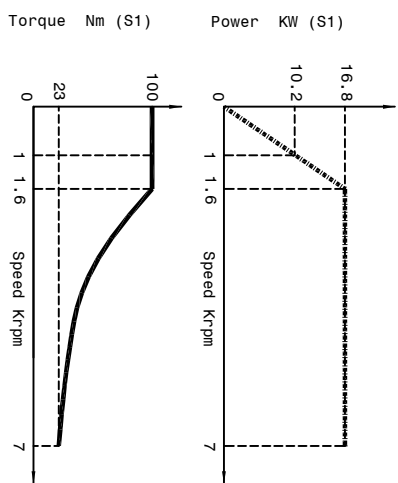

Synchronous motor: 6 poles
Runout taper: 0.002mm

Peron Speed
INTERMOTIVE

SUBJECT: PSI TA-203
ASA 8
CUSTOMER :