



Grease Bearings Lubrication
Coolant Capacity = 7150 Watt

- 1-Coolant inlet (G1/2") (3÷4 bar) (10÷12 L/min.)
- 2-Coolant outlet (G1/2")
- 5-Elattric connection
- 3Phases motor - Earth
- 7-Front-side pressurization filtered (5µm)
- (1-1.5 bar) (G1/8")
- 15-Outlet encoder's cables (Gel 2444 KN)
- Motor thermal switch (N°1 PT 1000)



- 15
- 1 white A+
 - 2 brown A-
 - 3 grey Ref+
 - 4 not connected
 - 5 not connected
 - 6 not connected
 - 7 not connected
 - 8 white-brown
 - 9 white-brown
 - 10 thermal switch PT 1000
 - 11 red +5V Dc
 - 12 Pink A-
 - 13 Pink B-
 - 14 not connected
 - 15 blue OV
 - 16 green 5V sensor
 - 17 not connected
- screen on carcass

SPEED	RPM	500	1000	4000
FREQUENCY	Hz	33	67	267
POWER (S1)	KW	23	46	46
TORQUE (S1)	Nm	440	440	110
TENSION	V	98	189	420
CURRENT	A	266	266	68

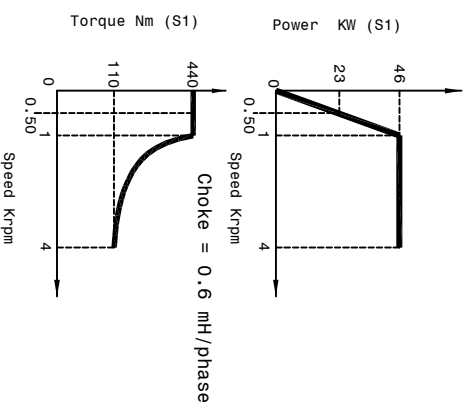

Synchronous motor: 8 poles Runout taper 0.002mm

Peron Speed
SUBJECT : PSI TA-301
CUSTOMER : ASA 8

Sheet:1/1 Dls. n°4273-00 DATE : 02/07/2021