



Grease Bearings Lubrication
Coolant Capacity = 7950 Watt

- 1-Coolant inlet (G1/2") (3+4 bar) (12+14 L/min.)
- 2-Coolant outlet (G1/2")
- 5-Electric connection 3Phases motor-Earth
- 5/a Phase V n°2 cables x 25 mm² - outlet cables center star
- 5/b Phase W n°2 cables x 25 mm²
- 5/c Phase U n°2 cables x 25 mm²
- 5/d Earth n°2 cables x 20 mm²
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")
- 15-Outlet encoder's cables (Gel 2444 KN)
- Motor thermal switch (N°1 PT 1000)




screen on carcass

- 1 White A+
- 2 brown A+
- 3 grey Ref-
- 4 not connected
- 5 not connected
- 6 not connected
- 7 blue OV
- 8 white-brown PT 1000
- 9 white-brown thermal switch PT 1000
- 10 red -5V Dc
- 11 pink B+
- 12 black B-
- 13 white Ref-
- 14 not connected
- 15 blue OV
- 16 green 5V sensor
- 17 not connected



SPEED	RPM	1200	3000
POWER (S1)	KW	74	74
TORQUE (S1)	Nm	600	234
TENSION (S1)	V	Max 425	
CURRENT (S1)	A	Max 170	

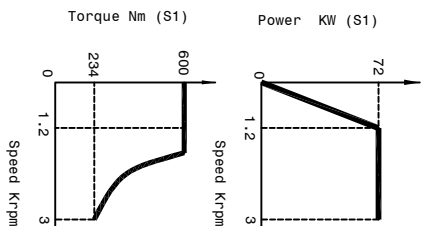

Synchronous motor: 16 poles

Runout taper 0.002mm

Peron Speed
SUBJECT: PSI TA-303
CUSTOMER : ASA 11

Sheet: 1/1 Dls. n° 4979-00 DATE : 02/07/2021