



Grease Bearings Lubrication
Coolant Capacity = 17900 Watt

- 1-Coolant inlet (G1/2") (3+4 bar) (12+14 L/min.)
- 2-Coolant outlet (G1/2")
- 5-Electric connection 3Phases motor-Earth
- 5/a Phase V n°4 cables x 25 mm²
- 5/b Phase W n°4 cables x 25 mm²
- 5/c Phase U n°4 cables x 25 mm²
- 5/d Earth n°2 cables x 20 mm²
- 7-Front-side pressurization filtered (5µm) (1-1.5 bar) (G1/8")
- 15-Outlet encoder's cables (Gel 2444 KN)
- Motor thermal switch (N°1 PT 1000)



SPEED	RPM	1300	1800	2500
FREQUENCY	Hz	87	120	167
POWER (S1)	KW	118	118	118
TORQUE (S1)	Nm	860	626	449
TENSION	V	399	420	420
CURRENT	A	520	376	285

Choke = 0.7 mH/phase

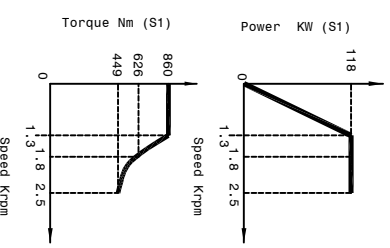

Synchronous motor: 8 poles
Runout taper: 0.002mm

Peron Speed
SUBJECT: PSI TA-304
ASA 11
CUSTOMER :
DATE : 02/07/2021

Sheet: 1/1
Dis. n° 4274-00